




DOUBLE PITCH

ANSI STANDARD STANDARD DOUBLE PITCH ROLLER CHAIN

AGRICULTURAL A TYPE



1. Designed for **low speed** and long distance **drive applications**.
2. All chain components are **heat-treated** to achieve maximum strength and greater wear resistance.
3. All PRINCE roller chain is **pre-loaded** during the manufacturing process to minimize initial elongation.
4. **Hot-dipped lubrication** ensures 100% lubrication of all chain components to extend wear life and reduce maintenance costs.

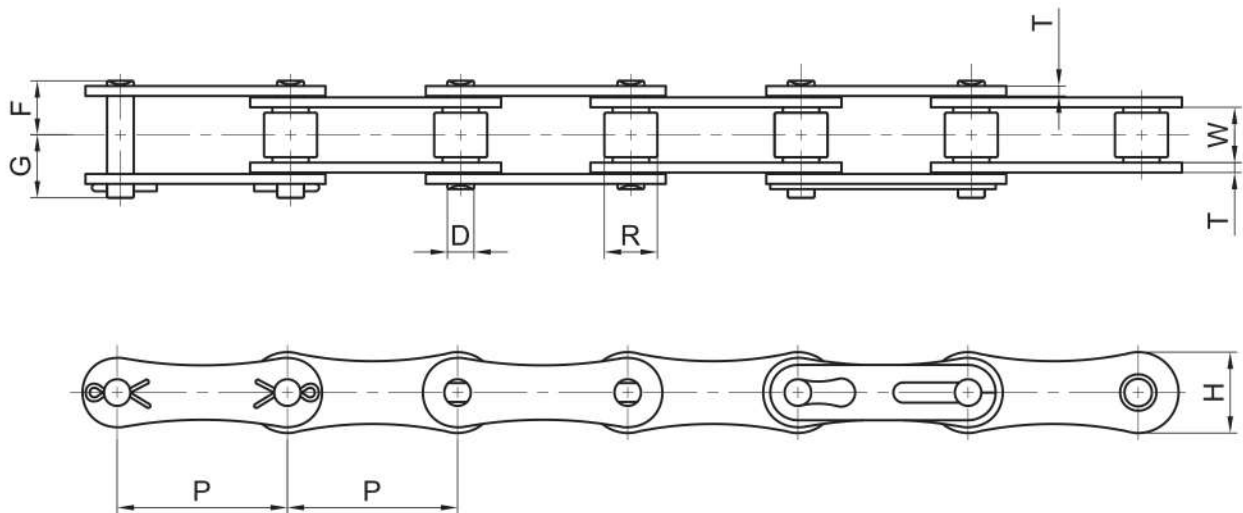


Chain	Pitch	Roller		Plate		Pin Dia.	Overall Width		Avg. Ult. Tensile Strength (Lbs.)	Max. Working Load (Lbs.)	Avg. Weight Per Foot (Lbs.)
		Width	Dia.	Height	Thickness						
	P	W	R	H	T	D	F	G			
A2041	1.000	0.250	0.306	0.390	0.050	0.142	0.263	0.334	2,866	441	0.242
A2040	1.000	0.312	0.312	0.475	0.060	0.157	0.324	0.406	4,189	661	0.276
A2050	1.250	0.375	0.400	0.594	0.080	0.200	0.400	0.488	6,834	990	0.457
A2060	1.500	0.500	0.469	0.712	0.094	0.235	0.501	0.601	9,259	1,430	0.638
A2080	2.000	0.625	0.625	0.950	0.125	0.313	0.650	0.803	17,637	2,420	1.176

ANSI STANDARD STANDARD DOUBLE PITCH ROLLER CHAIN

AGRICULTURAL A TYPE OVERSIZED ROLLERS

1. Designed for **low speed** and long distance **conveyor applications**.
2. All chain components are **heat-treated** to achieve maximum strength and greater wear resistance.
3. All PRINCE roller chain is **pre-loaded** during the manufacturing process to minimize initial elongation.
4. **Hot-dipped lubrication** ensures 100% lubrication of all chain components to extend wear life and reduce maintenance costs.

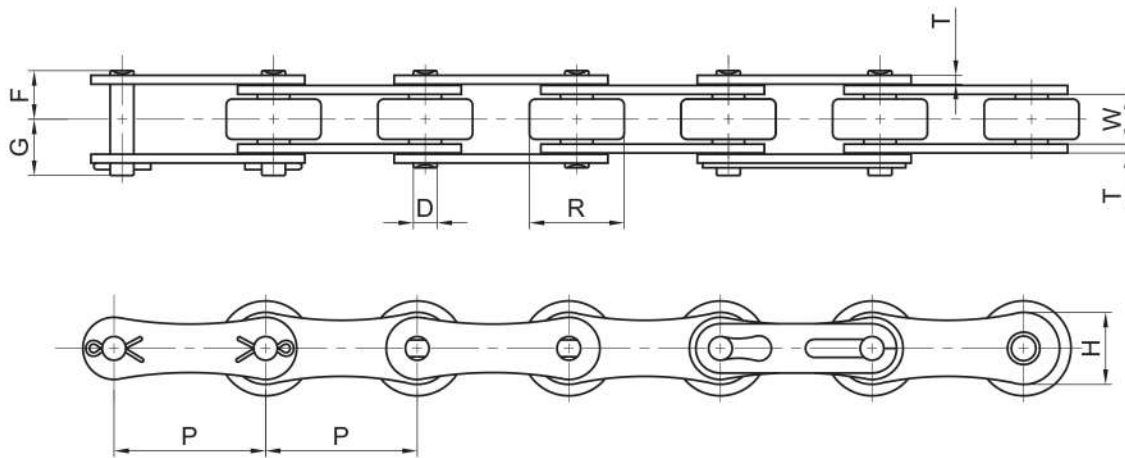


Chain	Pitch	Roller		Plate		Pin Dia.	Overall Width		Avg. Ult. Tensile Strength (Lbs.)	Max. Working Load (Lbs.)	Avg. Weight Per Foot (Lbs.)
		Width	Dia.	Height	Thickness						
	P	W	R	H	T	D	F	G			
A2042	1.000	0.312	0.625	0.475	0.060	0.157	0.324	0.406	4,189	661	0.276
A2052	1.250	0.375	0.750	0.594	0.080	0.200	0.400	0.488	6,834	992	0.457
A2062	1.500	0.500	0.875	0.712	0.094	0.235	0.501	0.601	9,259	1,430	1.115
A2082	2.000	0.625	1.125	0.950	0.125	0.313	0.650	0.803	17,637	2,420	1.176

ANSI STANDARD STANDARD DOUBLE PITCH ROLLER CHAIN

CONVEYOR C-TYPE



1. Designed for **low speed** and long distance **conveyor applications**.
2. All chain components are **heat-treated** to achieve maximum strength and greater wear resistance.
3. All PRINCE roller chain is **pre-loaded** during the manufacturing process to minimize initial elongation.
4. **Hot-dipped lubrication** ensures 100% lubrication of all chain components to extend wear life and reduce maintenance costs.

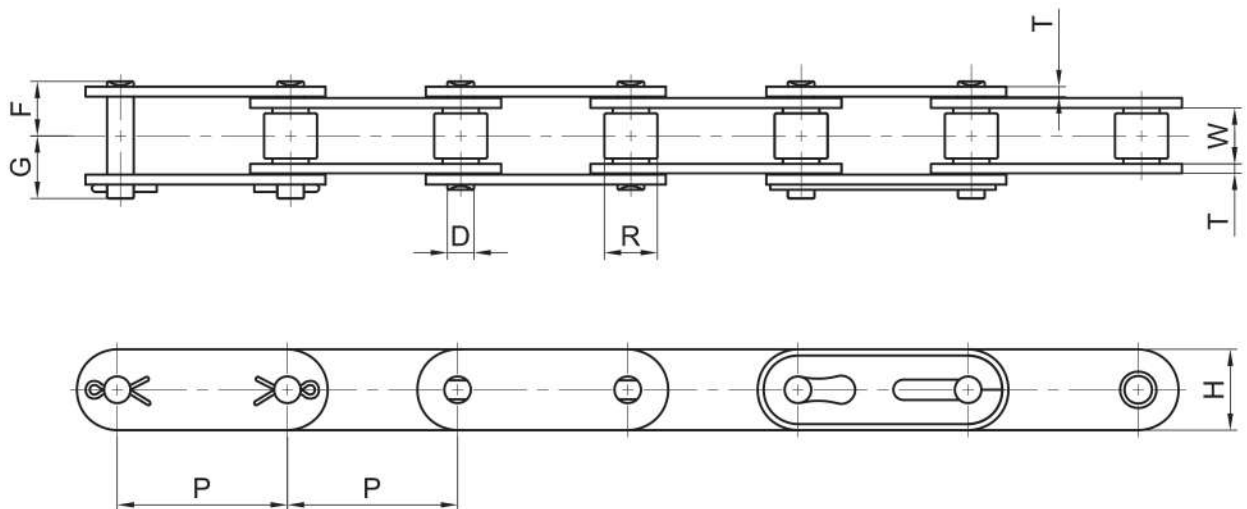


Chain	Pitch	Roller		Plate		Pin Dia.	Overall Width		Avg. Ult. Tensile Strength (Lbs.)	Max. Working Load (Lbs.)	Avg. Weight Per Foot (Lbs.)
		Width	Dia.	Height	Thickness						
	P	W	R	H	T	D	F	G			
C2040	1.000	0.312	0.312	0.475	0.060	0.157	0.324	0.406	4,189	661	0.316
C2050	1.250	0.375	0.400	0.594	0.080	0.200	0.400	0.488	6,834	992	0.538
C2060	1.500	0.500	0.469	0.712	0.094	0.235	0.501	0.601	9,259	1,433	0.759
C2080	2.000	0.625	0.625	0.950	0.125	0.313	0.650	0.803	17,637	2,425	1.337
C2050H	1.250	0.375	0.400	0.594	0.094	0.200	0.435	0.526	7,716	1,102	0.665
C2060H	1.500	0.500	0.469	0.712	0.125	0.235	0.567	0.606	12,125	1,543	0.947
C2080H	2.000	0.625	0.625	0.950	0.156	0.313	0.715	0.888	20,503	2,646	1.599
C2100H	2.500	0.750	0.750	1.187	0.187	0.376	0.860	0.998	30,865	4,079	2.459
C2120H	3.000	1.000	0.875	1.369	0.219	0.437	1.072	1.265	40,345	5,512	3.481
C2160H	4.000	1.250	1.125	1.900	0.281	0.562	1.339	1.546	69,446	9,259	5.745

ANSI STANDARD STANDARD DOUBLE PITCH ROLLER CHAIN



CONVEYOR C TYPE OVERSIZED ROLLERS

1. Designed for **low speed** and long distance **conveyor applications**.
2. All chain components are **heat-treated** to achieve maximum strength and greater wear resistance.
3. All PRINCE roller chain is **pre-loaded** during the manufacturing process to minimize initial elongation.
4. **Hot-dipped lubrication** ensures 100% lubrication of all chain components to extend wear life and reduce maintenance costs.

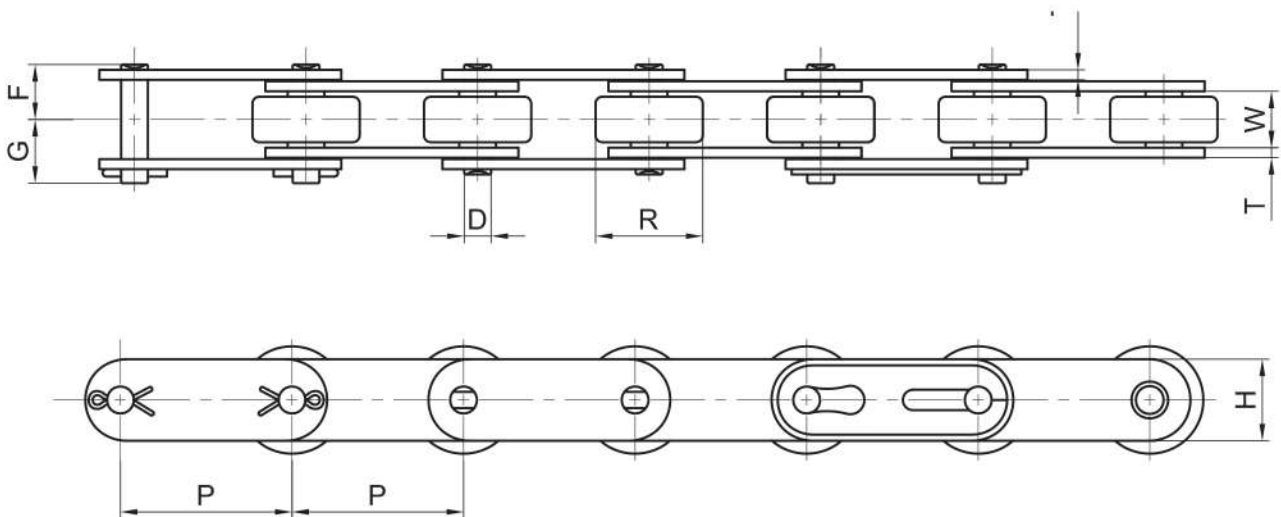


Chain	Pitch P	Roller		Plate		Pin Dia. D	Overall Width		Avg. Ult. Tensile Strength (Lbs.)	Max. Working Load (Lbs.)	Avg. Weight Per Foot (Lbs.)
		Width	Dia.	Height	Thickness						
		W	R	H	T		F	G			
C2042	1.000	0.312	0.625	0.475	0.060	0.157	0.324	0.406	4,189	661	0.558
C2052	1.250	0.375	0.750	0.594	0.080	0.200	0.400	0.488	6,834	992	0.853
C2062	1.500	0.500	0.875	0.712	0.094	0.235	0.501	0.601	9,259	1,433	1.223
C2082	2.000	0.625	1.125	0.950	0.125	0.313	0.650	0.803	17,637	2,425	2.063
C2052H	1.250	0.375	0.750	0.594	0.094	0.200	0.435	0.526	7,716	1,102	0.974
C2062H	1.500	0.500	0.875	0.712	0.125	0.235	0.567	0.606	12,125	1,543	1.431
C2082H	2.000	0.625	1.125	0.950	0.156	0.313	0.715	0.888	20,503	2,646	2.318
C2102H	2.500	0.750	1.562	1.187	0.187	0.376	0.860	0.998	30,865	4,079	3.944
C2122H	3.000	1.000	1.750	1.369	0.219	0.437	1.072	1.265	40,345	5,512	5.436
C2162H	4.000	1.250	2.250	1.900	0.281	0.562	1.339	1.546	69,446	9,259	8.729

ANSI STANDARD STANDARD DOUBLE PITCH ROLLER CHAIN

DELRIN ROLLERS




1. Designed for **low speed** and long distance **conveyor applications**.
2. All chain components are **heat-treated** to achieve maximum strength and greater wear resistance.
3. All PRINCE roller chain is **pre-loaded** during the manufacturing process to minimize initial elongation.
4. **Hot-dipped lubrication** ensures 100% lubrication of all chain components to extend wear life and reduce maintenance costs.

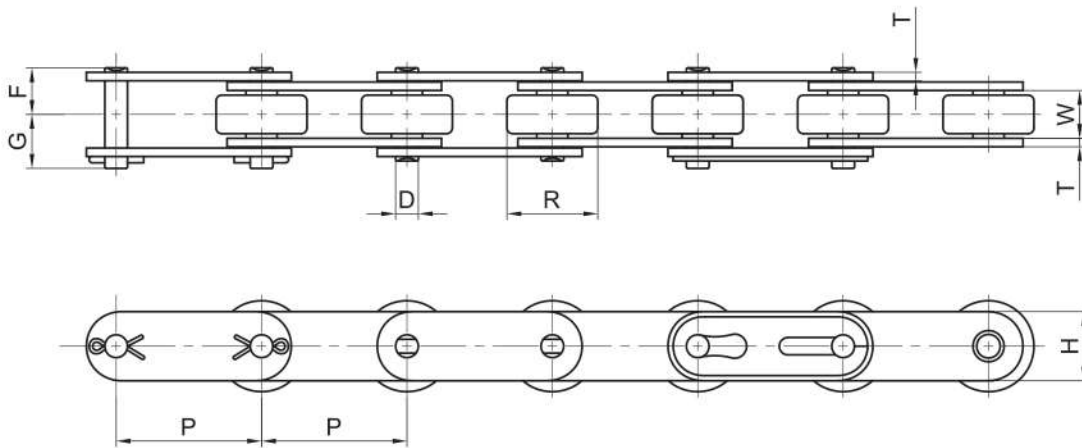

Chain	Pitch	Roller		Plate		Pin Dia.	Overall Width		Avg. Ult. Tensile Strength (Lbs.)	Max. Working Load (Lbs.)	Avg. Weight Per Foot (Lbs.)
		Width	Dia.	Height	Thickness						
	P	W	R	H	T	D	F	G			
A2042	1.000	0.312	0.625	0.475	0.060	0.157	0.324	0.406	4,189	661	0.276
C2042	1.000	0.312	0.625	0.475	0.060	0.157	0.324	0.406	4,189	661	0.558
A2052	1.250	0.375	0.750	0.594	0.080	0.200	0.400	0.488	6,834	992	0.457
C2052	1.250	0.375	0.750	0.594	0.080	0.200	0.400	0.488	6,834	992	0.853
C2052H	1.250	0.375	0.750	0.594	0.094	0.200	0.435	0.526	7,716	1,102	1.450
A2062	1.500	0.500	0.875	0.712	0.094	0.235	0.501	0.601	9,259	1,433	1.115
C2062	1.500	0.500	0.875	0.712	0.094	0.235	0.567	0.601	9,259	1,433	1.223
C2062H	1.500	0.500	0.875	0.712	0.125	0.235	0.567	0.606	12,125	1,433	1.431
A2082	2.000	0.625	1.125	0.950	0.125	0.313	0.650	0.803	17,637	2,425	1.176
C2082	2.000	0.625	1.125	0.950	0.125	0.313	0.715	0.803	17,637	2,425	2.063
C2082H	2.000	0.625	1.125	0.950	0.156	0.313	0.715	0.888	20,503	2,646	2.318
C2102H	2.500	0.750	1.750	1.187	0.187	0.376	0.860	0.998	30,865	4,079	3.944
C2122H	3.000	1.000	1.750	1.369	0.219	0.437	1.072	1.265	40,345	5,512	5.436
C2162H	4.000	1.250	2.250	1.900	0.281	0.562	1.339	1.546	69,446	9,259	8.729

The logo is a white circular emblem with a serrated, sunburst-like border. Inside the circle, the words "PRINCE" and "GROUP" are stacked vertically in a bold, sans-serif font. A small black dot is positioned between the two words.

PRINCE
GROUP

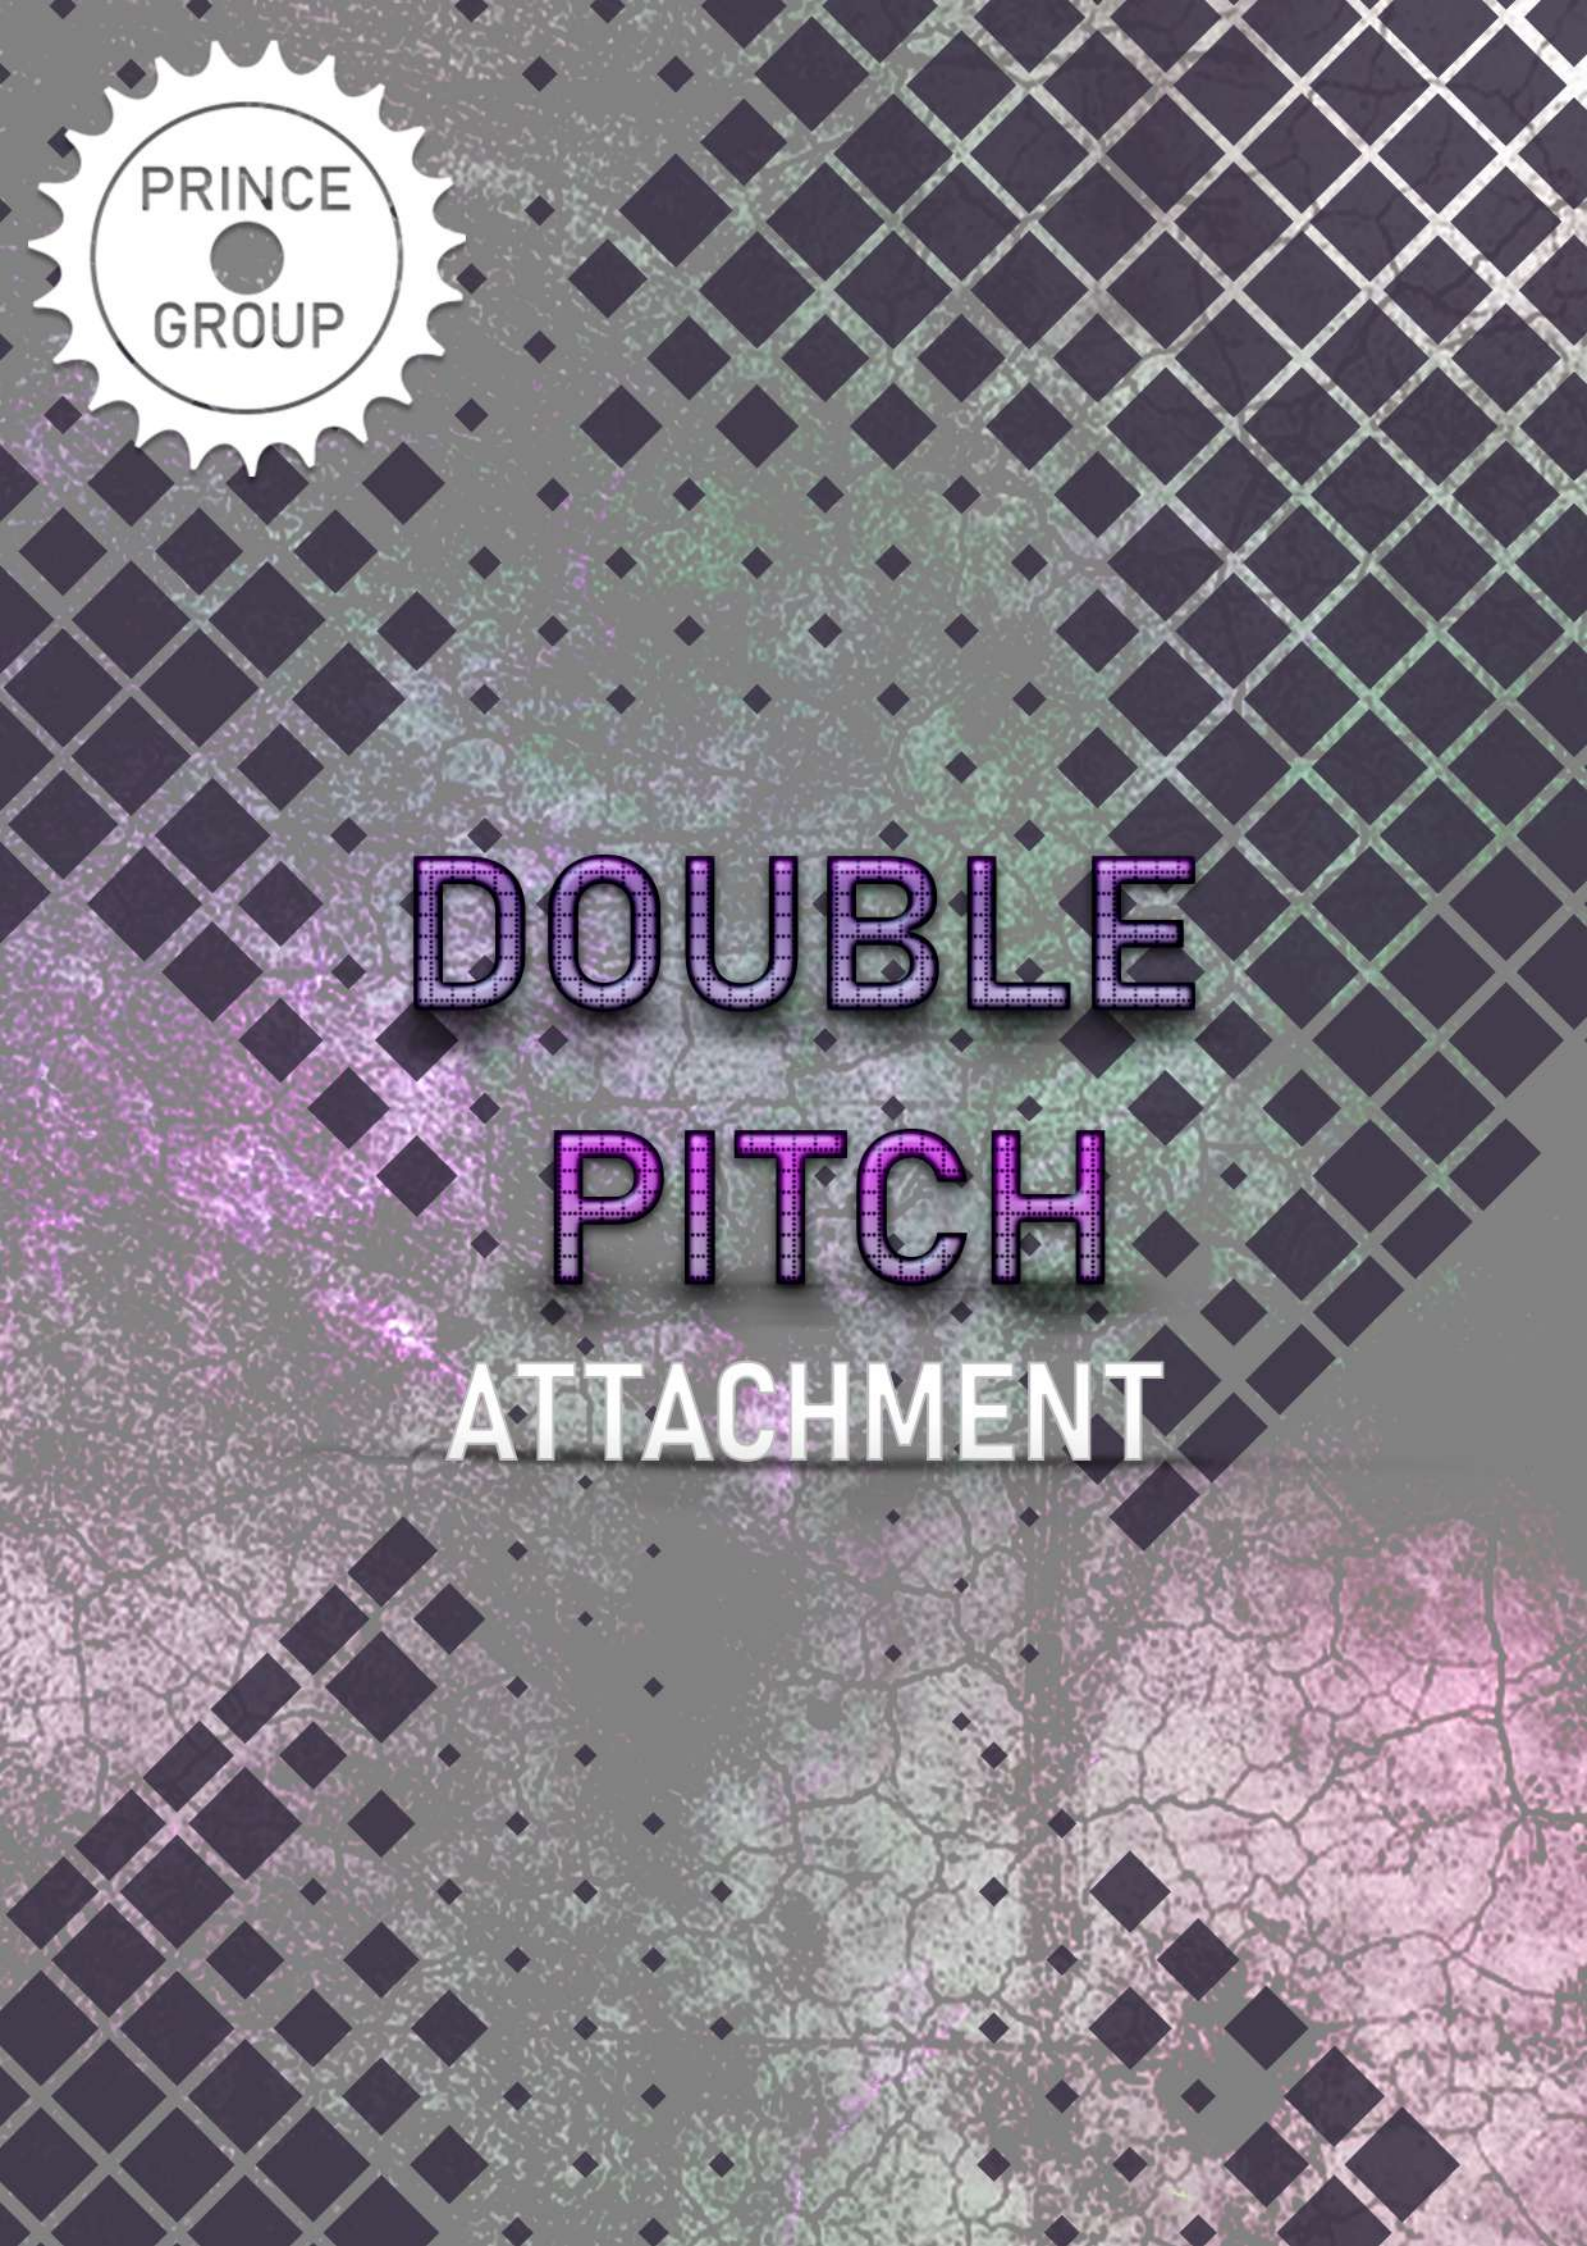The background features a repeating diamond-shaped lattice pattern in a dark purple color. This pattern is overlaid on a textured, mottled background of light purple and grey. The text "DOUBLE PITCH ATTACHMENT" is centered in the middle of the image.


DOUBLE PITCH ATTACHMENT

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS A-1 K-1


A-1

Bent one side with one hole in each tab

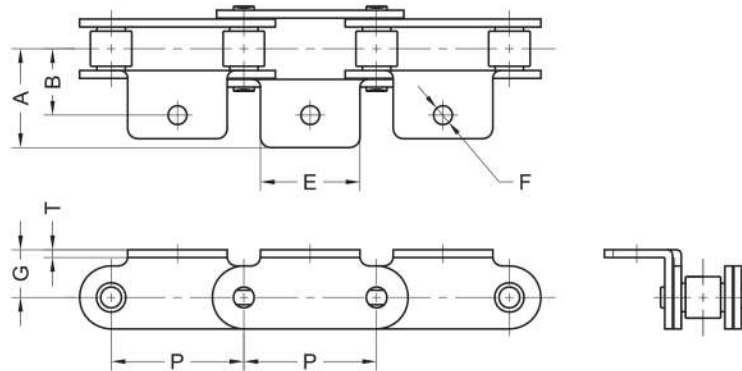

K-1

Bent two sides with one hole in each tab

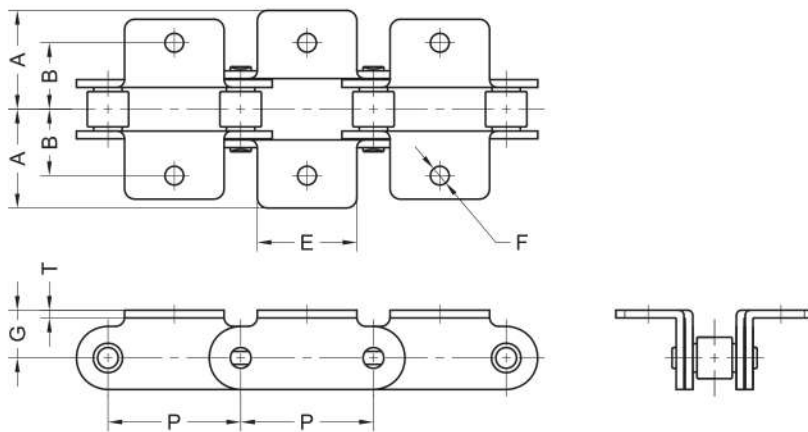


Chain	Pitch	Attachment dimensions					
	P	A	B	E	F	G	T
C2040	1.000	0.742	0.500	0.750	0.141	0.359	0.060
C2050	1.250	0.945	0.625	1.000	0.203	0.438	0.080
C2060H	1.500	1.203	0.844	1.125	0.203	0.578	0.125
C2080H	2.000	1.575	1.094	1.500	0.266	0.750	0.156
C2100H	2.500	1.965	1.312	1.875	0.328	0.922	0.187
C2120H	3.000	2.390	1.562	2.250	0.391	1.094	0.219
C2160H	4.000	3.157	2.062	2.965	0.518	1.438	0.281

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS A-2 K-2


A-2

Bent one side with two holes in each tab

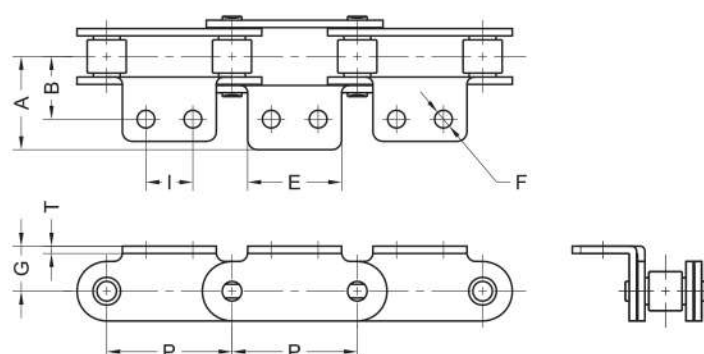

K-2

Bent two sides with two holes in each tab

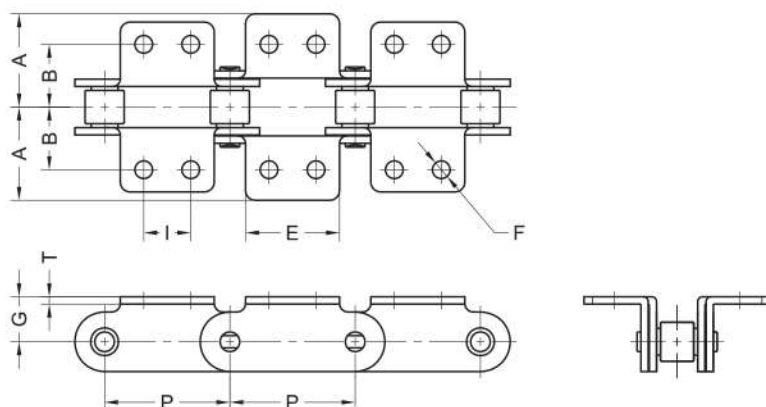


Chain	Pitch	Attachment dimensions						
	P	A	B	E	F	G	I	T
C2040	1.000	0.742	0.500	0.750	0.141	0.359	0.375	0.060
C2050	1.250	0.945	0.625	1.000	0.203	0.438	0.469	0.080
C2060H	1.500	1.203	0.844	1.125	0.203	0.578	0.562	0.125
C2080H	2.000	1.575	1.094	1.500	0.266	0.750	0.750	0.156
C2100H	2.500	1.965	1.312	1.875	0.328	0.922	0.937	0.187
C2120H	3.000	2.390	1.562	2.250	0.391	1.094	1.125	0.219
C2160H	4.000	3.157	2.062	2.965	0.518	1.438	1.500	0.281

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS AA-1 KK-1


AA-1

Two bends one side with one hole in each tab

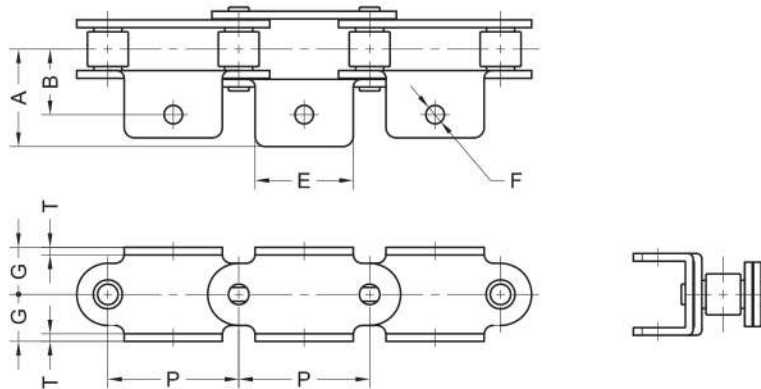

KK-1

Two bends two sides with one hole in each tab

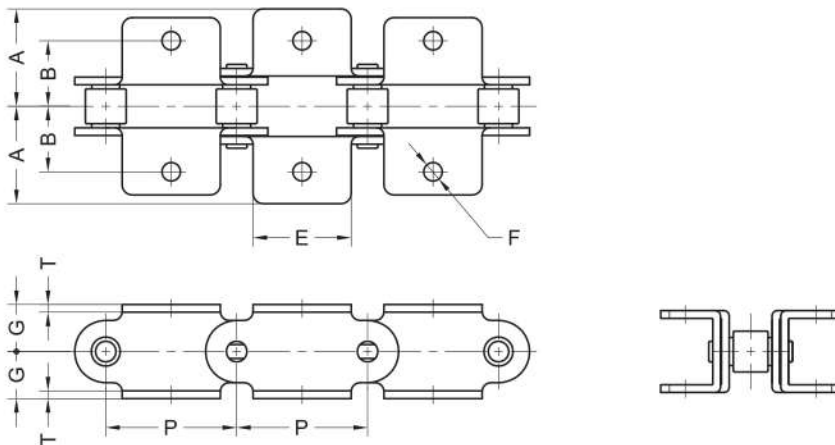


Chain	Pitch	Attachment dimensions					
	P	A	B	E	F	G	T
C2040	1.000	0.742	0.500	0.750	0.141	0.359	0.060
C2050	1.250	0.945	0.625	1.000	0.203	0.438	0.080
C2060H	1.500	1.203	0.844	1.125	0.203	0.578	0.125
C2080H	2.000	1.575	1.094	1.500	0.266	0.750	0.156
C2100H	2.500	1.965	1.312	1.875	0.328	0.922	0.187
C2120H	3.000	2.390	1.562	2.250	0.391	1.094	0.219
C2160H	4.000	3.157	2.062	2.965	0.518	1.438	0.281

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS SA-1 SK-1


SA-1

Straight one side with one hole in each tab

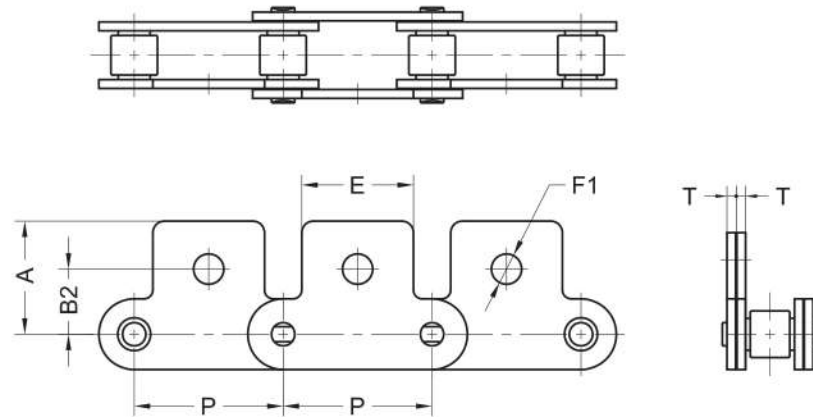

SK-1

Straight two sides with one hole in each tab

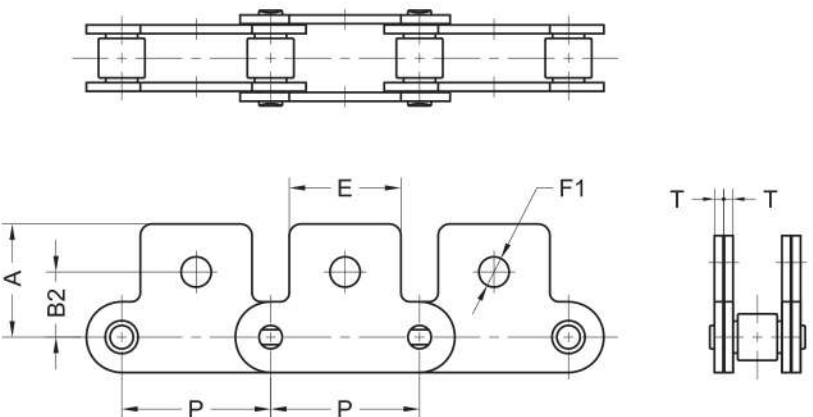


Chain	Pitch	Attachment dimensions				
	P	A	B2	E	F	T
C2040	0.375	0.759	0.438	0.750	0.203	0.060
C2050	0.375	0.969	0.562	1.000	0.250	0.080
C2060H	0.500	1.172	0.688	1.125	0.328	0.125
C2080H	0.500	1.500	0.875	1.500	0.391	0.156
C2100H	0.500	1.984	1.125	1.875	0.516	0.187
C2120H	0.625	2.359	1.312	2.250	0.578	0.219
C2160H	0.625	3.025	1.750	2.965	0.766	0.281

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS SA-2 SK-2


SA-2

Straight one side with two holes in each tab

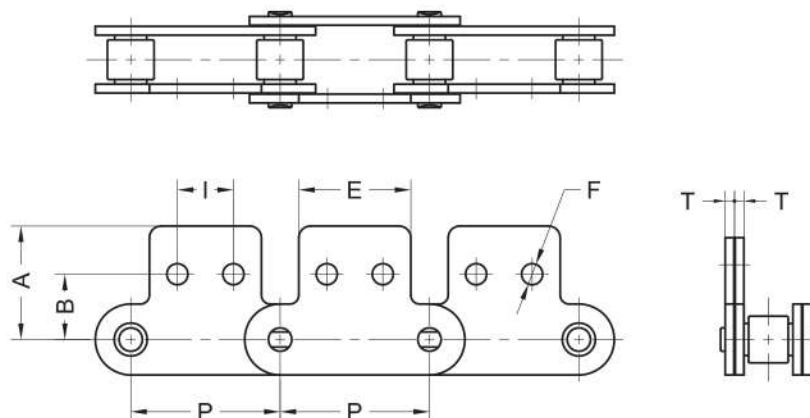

SK-2

Straight two sides with two holes in each tab

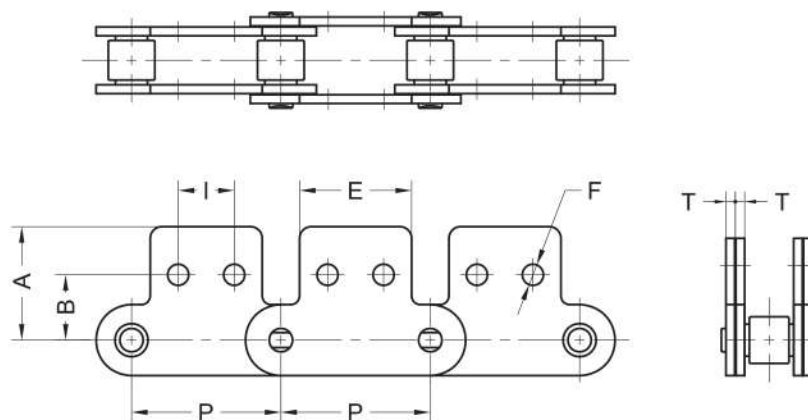


Chain	Pitch	Attachment dimensions					
	P	A	B	E	F	I	T
C2040	0.375	0.759	0.531	0.750	0.141	0.375	0.060
C2050	0.375	0.969	0.625	1.000	0.203	0.469	0.080
C2060H	0.500	1.172	0.750	1.125	0.203	0.562	0.125
C2080H	0.500	1.500	1.000	1.500	0.266	0.750	0.156
C2100H	0.500	1.984	1.250	1.875	0.328	0.938	0.187
C2120H	0.625	2.359	1.469	2.250	0.390	1.125	0.219
C2160H	0.625	3.025	2.000	2.965	0.521	1.500	0.281

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS SAA-1 SKK-1


SAA-1

Two straight one side with one hole in each tab

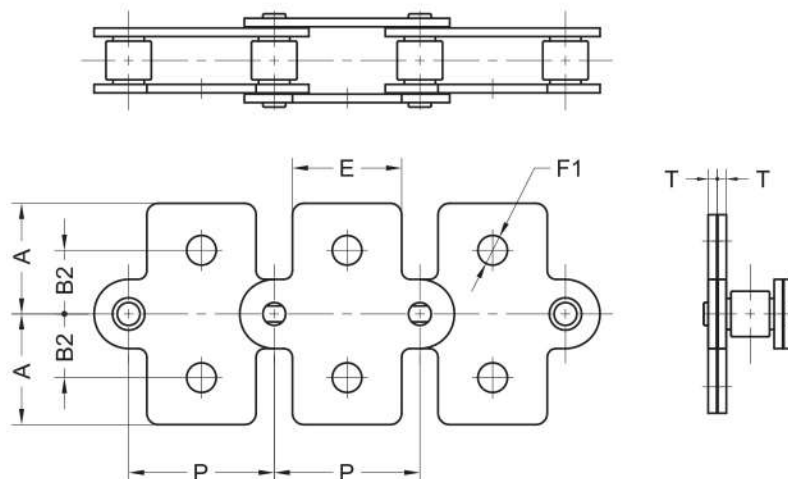

SKK-1

Two straight two sides with one hole in each tab

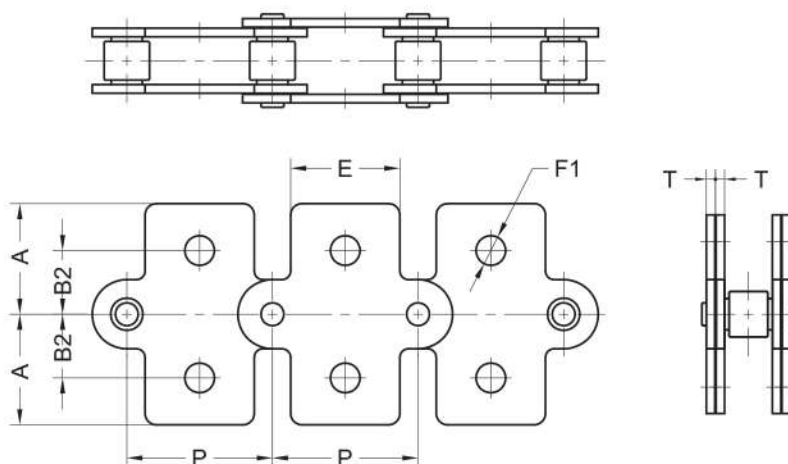

Chain	Pitch	Attachment dimensions				
	P	A	B2	E	F	T
C2040	0.375	0.759	0.438	0.750	0.141	0.060
C2050	0.375	0.969	0.562	1.000	0.203	0.080
C2060H	0.500	1.172	0.688	1.125	0.203	0.125
C2080H	0.500	1.500	0.875	1.500	0.266	0.156
C2100H	0.500	1.984	1.125	1.875	0.328	0.187
C2120H	0.625	2.359	1.312	2.250	0.390	0.219
C2160H	0.625	3.025	1.750	2.965	0.521	0.281

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN



ATTACHMENTS D-1 DD-1

D-1

One pin extended one side

DD-1

One pin extended two sides

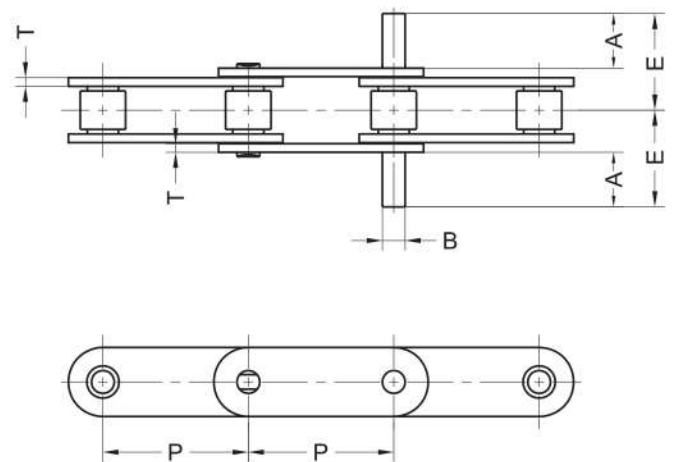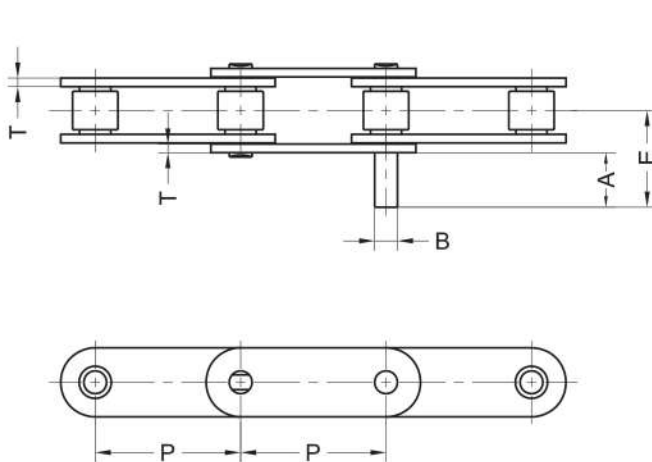


Chain	Pitch	Attachment dimensions			
	P	A	B	T	E
C2040	1.000	0.375	0.157	0.060	0.661
C2050	1.250	0.469	0.200	0.080	0.827
C2060H	1.500	0.562	0.235	0.125	1.062
C2080H	2.000	0.750	0.313	0.156	1.375
C2100H	2.500	0.930	0.376	0.187	1.679
C2120H	3.000	1.125	0.437	0.219	2.063
C2160H	4.000	1.500	0.563	0.281	2.687

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS D-3 DD-3


D-3

Two pins extended one side

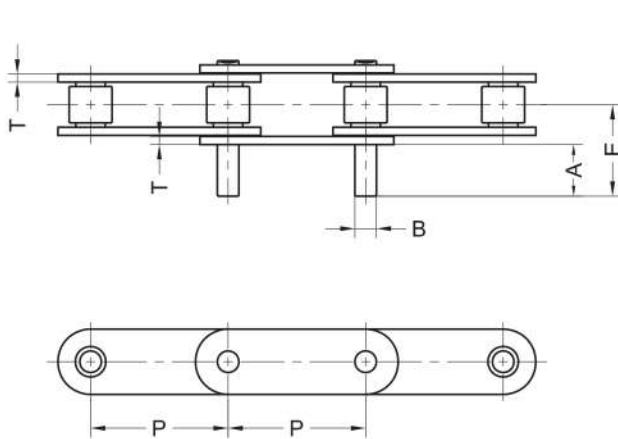

DD-3

Two pins extended two sides

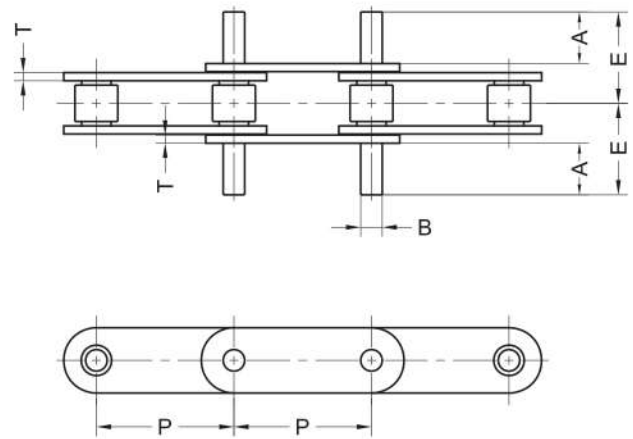


Chain	Pitch	Attachment dimensions			
	P	A	B	T	E
C2040	1.000	0.375	0.157	0.060	0.661
C2050	1.250	0.469	0.200	0.080	0.827
C2060H	1.500	0.562	0.235	0.125	1.062
C2080H	2.000	0.750	0.313	0.156	1.375
C2100H	2.500	0.930	0.376	0.187	1.679
C2120H	3.000	1.125	0.437	0.219	2.063
C2160H	4.000	1.500	0.563	0.281	2.687

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS D-5

D-5

One pin extended on one side in center of the link

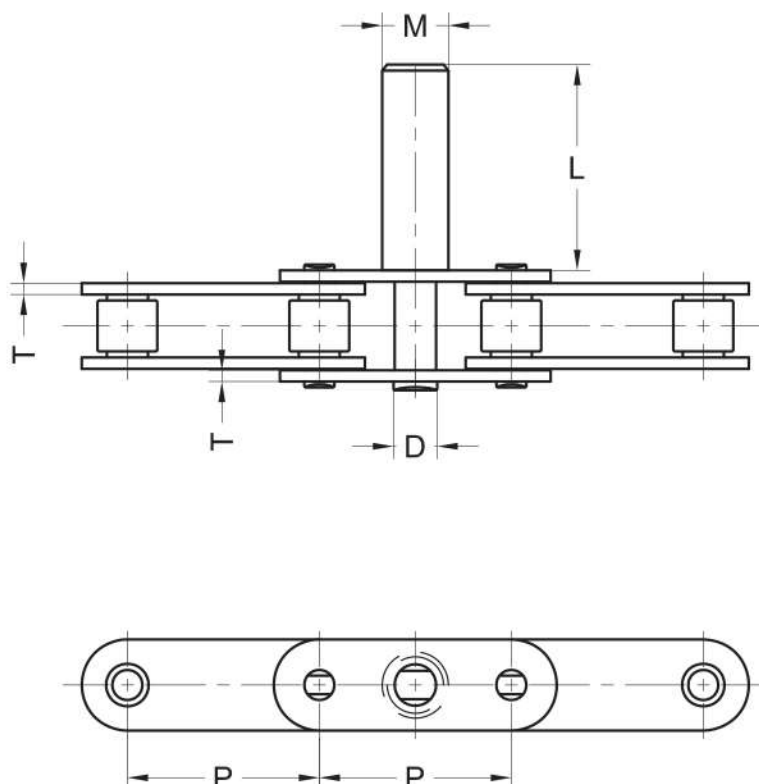


Chain	Pitch	Attachment dimensions			
	P	L	M	D	T
C2040	1.000	0.750	0.250	0.157	0.060
C2050	1.250	0.773	0.282	0.200	0.080
C2060H 1/2"	1.500	1.625	0.500	0.313	0.125
C2060H 1/2" TD	1.500	1.625	0.500	0.235	0.125
C2060H 9/16"	1.500	1.625	0.563	0.313	0.125
C2080H 1/2"	2.000	1.625	0.500	0.313	0.156
C2080H 17/32"	2.000	1.250	0.523	0.313	0.156
C2100H	2.500	1.563	0.563	0.375	0.187

ANSI STANDARD DOUBLE PITCH ATTACHMENT CHAIN

ATTACHMENTS G-1

G-1

One thru hole on each plate in center of link

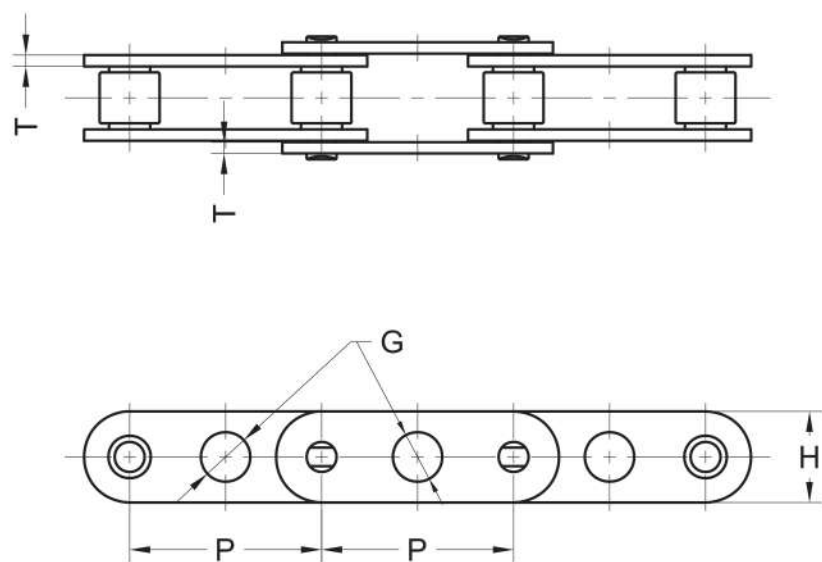

Chain	Pitch	Attachment dimensions		
	P	H	G	T
C2040	1.000	0.463	0.156	0.060
C2040	1.000	0.463	0.250	0.060
C2040	1.000	0.463	0.313	0.060
C2050	1.250	0.594	0.219	0.080
C2060H	1.500	0.712	0.235	0.125
C2080H	2.000	0.950	0.313	0.156
C2100H	2.500	1.187	0.376	0.187